


**Anbotek Compliance Laboratory Limited**

**Voltage Mains FCC PART 15 CLASS B**

EUT: XXXX N/M:XXXX  
 Manufacturer: XXXX  
 Operating Condition: FULL LOAD  
 Test Site: 1# Shielded Room  
 Operator: Bevan Zhang  
 Test Specification: AC 110V/60Hz  
 Comment: L  
 Temp.=22.2 Hum.=55%

**SCAN TABLE: "Voltage(150K~30M)FIN"**

Short Description: 150K-30M Disturbance Voltages

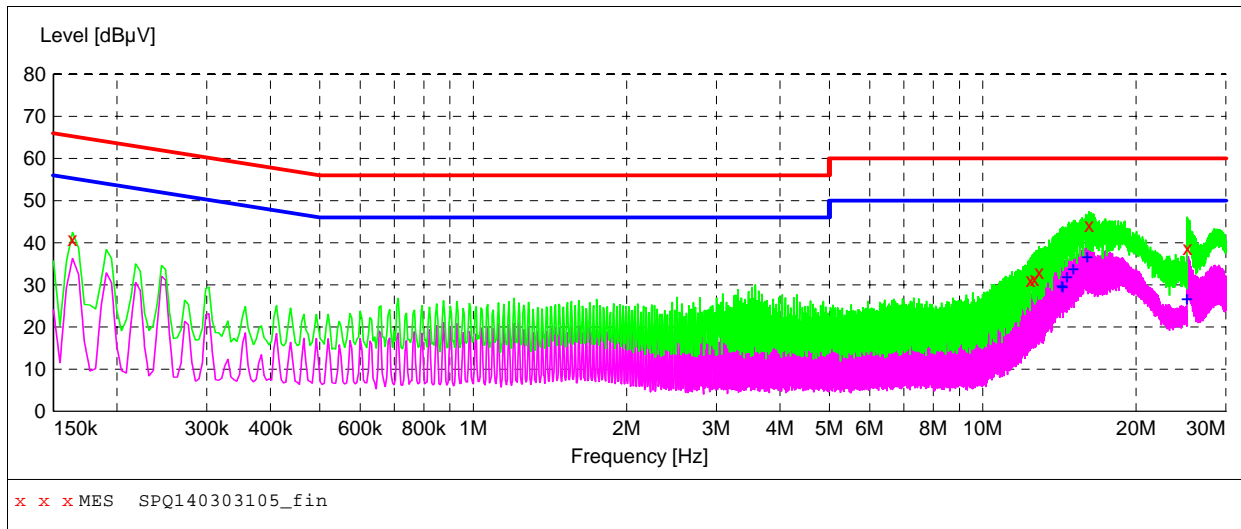

**MEASUREMENT RESULT: "SPQ140303105\_fin"**

3/3/2014 10:48AM

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.163500	40.90	20.1	65	24.4	QP	L1	GND
12.398500	31.10	20.7	60	28.9	QP	L1	GND
12.614500	31.30	20.7	60	28.7	QP	L1	GND
12.889000	33.00	20.7	60	27.0	QP	L1	GND
16.165000	44.10	20.7	60	15.9	QP	L1	GND
25.201000	38.70	20.9	60	21.3	QP	L1	GND

**MEASUREMENT RESULT: "SPQ140303105\_fin2"**

3/3/2014 10:48AM

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
14.306500	30.00	20.7	50	20.0	AV	L1	GND
14.360500	29.60	20.7	50	20.4	AV	L1	GND
14.635000	32.10	20.7	50	17.9	AV	L1	GND
15.071500	34.00	20.7	50	16.0	AV	L1	GND
16.052500	36.70	20.7	50	13.3	AV	L1	GND
25.174000	26.80	20.9	50	23.2	AV	L1	GND